

**STANLEY**



# STANLEY GMT SERIES

Automatic Sliding Door System

**SG-DSL**



*The Stanley GMT Series automatic sliding door operator, SG-DSL, is engineered to provide an effective and cost efficient solutions to provide automation to virtually any new or existing sliding door.*

*The system is equipped with the basic operating functions and safety features that will meet the international requirements for Automatic sliding system.*



**Stanley Automatic Sliding System**

**Standard Operating Features:**

- Hold Open mode
- Automatic mode
- Lock mode
- Half Open mode

**Intelligence DSL Controller:**

- Automatic recognition module, where Open and Close position are identified automatically.
- Minimum configuration required.

**Safety logic features**

Bounce back feature, where the door panel will open upon hitting any obstacles during operation.

**Types of sensors**

Compatible to most kinds of sensors and switches in market.







**Technical details and Specifications**

Power Required	220V
Power Consumption	70W
Maximum Door Weight (Double Panel Sliding)	120kg
Maximum Door Weight (Single Panel Sliding)	150kg
Opening Time (Adjustable)	20cm/s-45cm/s
Hold Open Time (Adjustable)	1s – 9s
Max. Door Frame Depth	450mm
Max. Opening Angle	120°
Optimum operation temperature	-20°C - 50°C
Noise output	Less than 55Db

<b>Door Width Table</b>			
<b>Model</b>	<b>Operator length</b>	<b>Single/Bi-part</b>	<b>Clear Opening (Panel width + 50mm)</b>
SG-DSLS-120	2500mm	Single	1200mm
		Bi-part	Not Applicable
SG-DSL-120	4200mm	Single	2000mm
		Bi-part	1000mm
SG-DSL5-120	5000mm	Single	2400mm
		Bi-part	1200mm
SG-DSL6-120	6000mm	Single	2800mm
		Bi-part	1400mm

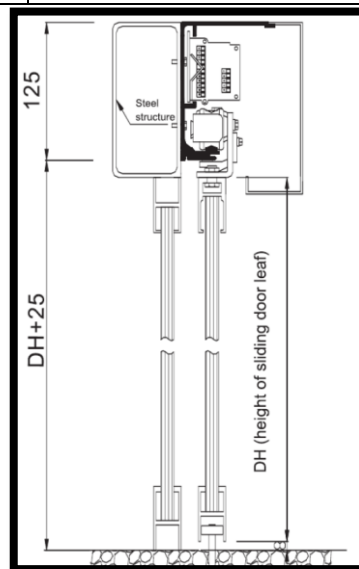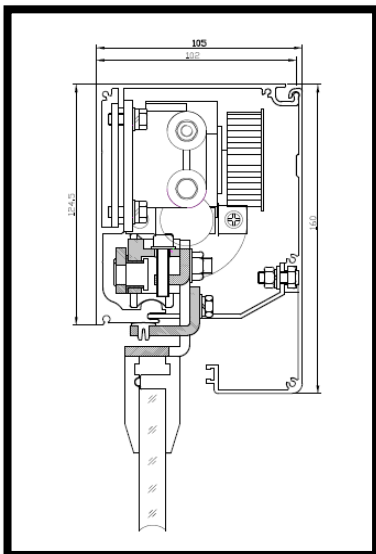



## ***Automatic Sliding Door Products from Stanley***

For years, Stanley ranges of automatic door operators have provided easy access and smooth traffic flow in high-traffic retail, commercial and industrial applications with unbeaten performance and reliability.

- Designed to fit a wide range of automatic applications.
- Choose from low-energy to full energy solutions.
- Controller configuration via Bluetooth® Technology.
- Most solutions powered by an advanced microprocessor controller for intelligent performance.
- Door packages are custom manufactured to fit your job requirements.



***StanleyBlack&Decker***

**China & North East Asia**

**STANLEY GMT Hardware Co.,Ltd.**  
2/F, Tower C, No.7001, Zhongchun  
Rd, Minhang District, Shanghai, China

**South East Asia**

**Black & Decker Asia Pacific Pte Ltd.**  
67 Ubi Avenue 1, #02-13, Starhub Green Singapore 408942

Distributed by: